



T-Series Window Model

- Extract/intake fans in 4 sizes:
6" (150mm), 7" (190mm), 9" (230mm) & 12" (300mm).
- Patented electronic shutter system ensures quiet trouble free operation.
- Designed to comply with International safety standards. The T-Series window range are reversible, speed control-able with instant backdraught shutter.
- Suitable for single or double glazed windows.
- Single unit or group controllers available.
- Low sound levels.

T-Series range is fitted with a **Vent-Axia M-Tech** motor, developed to improve performance and lower running costs, and maintain T-Series' rugged reliability. A patented speed control pack is simply plugged in one of 3 positions to provide low, medium or boost speed matching the fan performance to the requirements of the installation.

Designed for use in single or double glazing and most types of glass and material up to 32mm thick. Greater thicknesses can be accommodated using extended fixing rod sets.

Alternatively, the T-Series range can be used in conjunction with Vent-Axia ventilation accessories in flexible and rigid ducting systems to suit individual requirements.

The fan can also be mounted in a fixing plate on walls, in ducts or above ceilings. Sensors and auto mode controllers save energy by only switching the ventilation units on when needed and when the room is occupied. The shutter is electronically controlled by an actuator with a damped action giving quiet operation during instant opening and closing. The interlocking edges of the shutter blades provide maximum backdraught protection. The Size 6 model provides the necessary trickle ventilation control to meet Building Regulation Requirements in domestic applications. Suitable for running at any angle. Quiet running, enclosed.



When the ventilating unit is used with a T-Series controller, the shutter can be set open with the fan motor switched Off to provide natural ventilation without the security risk of an open window.

T-Series Controller

Three speeds.
Choice of extract/intake
Shutter open, fan Off setting
Sensor mode. Enables external electromechanical switches, eg: Ecotronic, HumidiSwitch, ThermoSwitch and TimeSwitch to control the fan.



Type	Price
T Series	€ 123,00

Ecotronic Controller 400

For groups of units of any one size up to a total of 400 (W)s.
Speed controllers, pages 166-169.





Type	Price
Ecotronic 400	€ 181,00

TXWW Series

Type	Power W	Diameter Hole Ø mm	Air flow m ³ /h			Noise Level dB (A)	Price
			Low Speed	Medium Speed	Hi Speed		
TX 6 WW – 150	30	184	245	315	360	41	€ 298,00
TX 7 WW – 190	40	222	305	395	485	37	€ 302,00
TX 9 WW – 230	85	260	465	685	795	43	€ 352,00
TX 12 WW – 300	100	337	1.095	1.415	1.615	48	€ 382,00


Top Socket

- A connector Top Socket is now standard on all T-Series fans. Allowing fast and trouble-free mains connection.

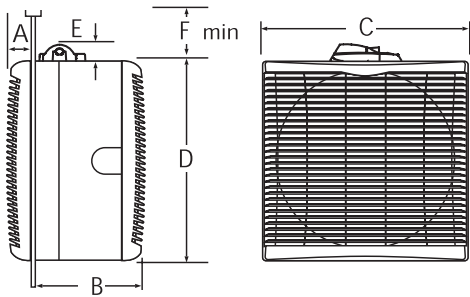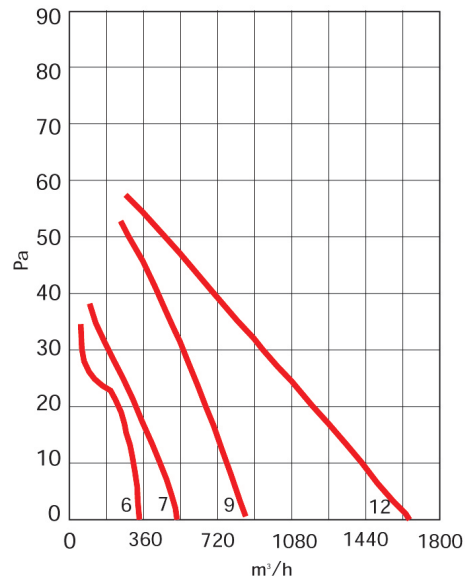

Fixing hole:

TX 6 WW-150	184mm
TX 7 WW-190	222mm
TX 9 WW-230	260mm
TX 12 WW-300	337mm

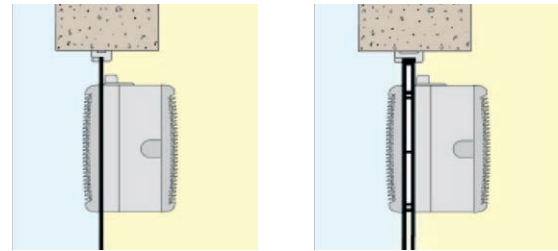

TXWW Series Dimensions

Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Weight (Kg)
TX 6 WW – 150	31	130	226	220	19	54	3,57
TX 7 WW – 190	31	130	265	258	19	54	3,93
TX 9 WW – 230	39	150	304	302	19	54	5,35
TX 12 WW – 300	41	177	381	378	19	54	7,74

