


## Centrifugal Fan: Solo Plus

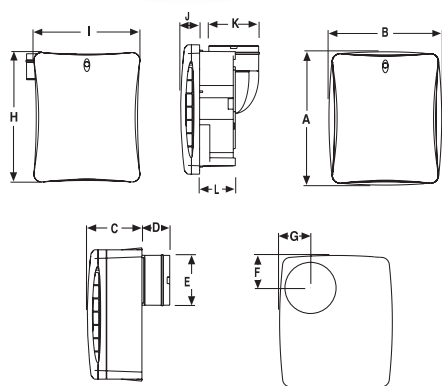

- Built-in washable filter feature.
- Supply voltage 220-240V/1/50Hz.
- **IPX4 rated.**
- Flush or surface mountable.
- Adjustable rear or side exit spigot.
- Extremely low sound levels.
- Washable removable filter.
- The 100mm circular spigot on the back of the Solo Plus offers 2 position ducting entries.

### Solo Plus Series

Type	Power (WATT)	Air flow (m <sup>3</sup> /h)	Noise Level dB (A)	Price
SoloPlus P	29	90	40,3	€ 114,00
SoloPlus T	29	90	40,3	€ 119,00
SoloPlus HT	29	90	40,3	€ 147,00

### Solo Plus Series Dimensions

Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)	K (mm)	L (mm)
Solo Plus P/T/HT	261	221	107	54,5	98	64	61	253	208	37	98	70


## Centrifugal Fan: CF 200 S



- Very efficient centrifugal fan for small diameter (100mm) and long air ducts installations, where simple bathroom ventilators are not efficient. It can be installed in any place, supplying high static pressure.
- Wall and ceiling mounting.
- Very durable **ABS** thermoplastic material.
- Silent Operation.
- Extremely fine and elegant design.
- Protection rating **IPX4**.



BU-160 Control unit

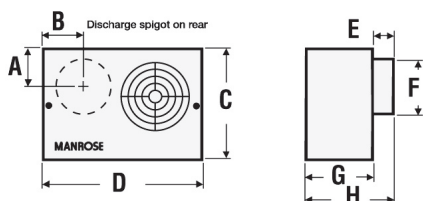

### CF 200 S Series

Type	Power (WATT)	Voltage Volt	Air flow (m <sup>3</sup> /h)	Noise Level dB (A)	Price
CF 200 S	45	230	110	45	€ 56,00

### CF 200 S Series Dimensions

Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)
CF 200 S	65	65	185	260	45	98	90	135